
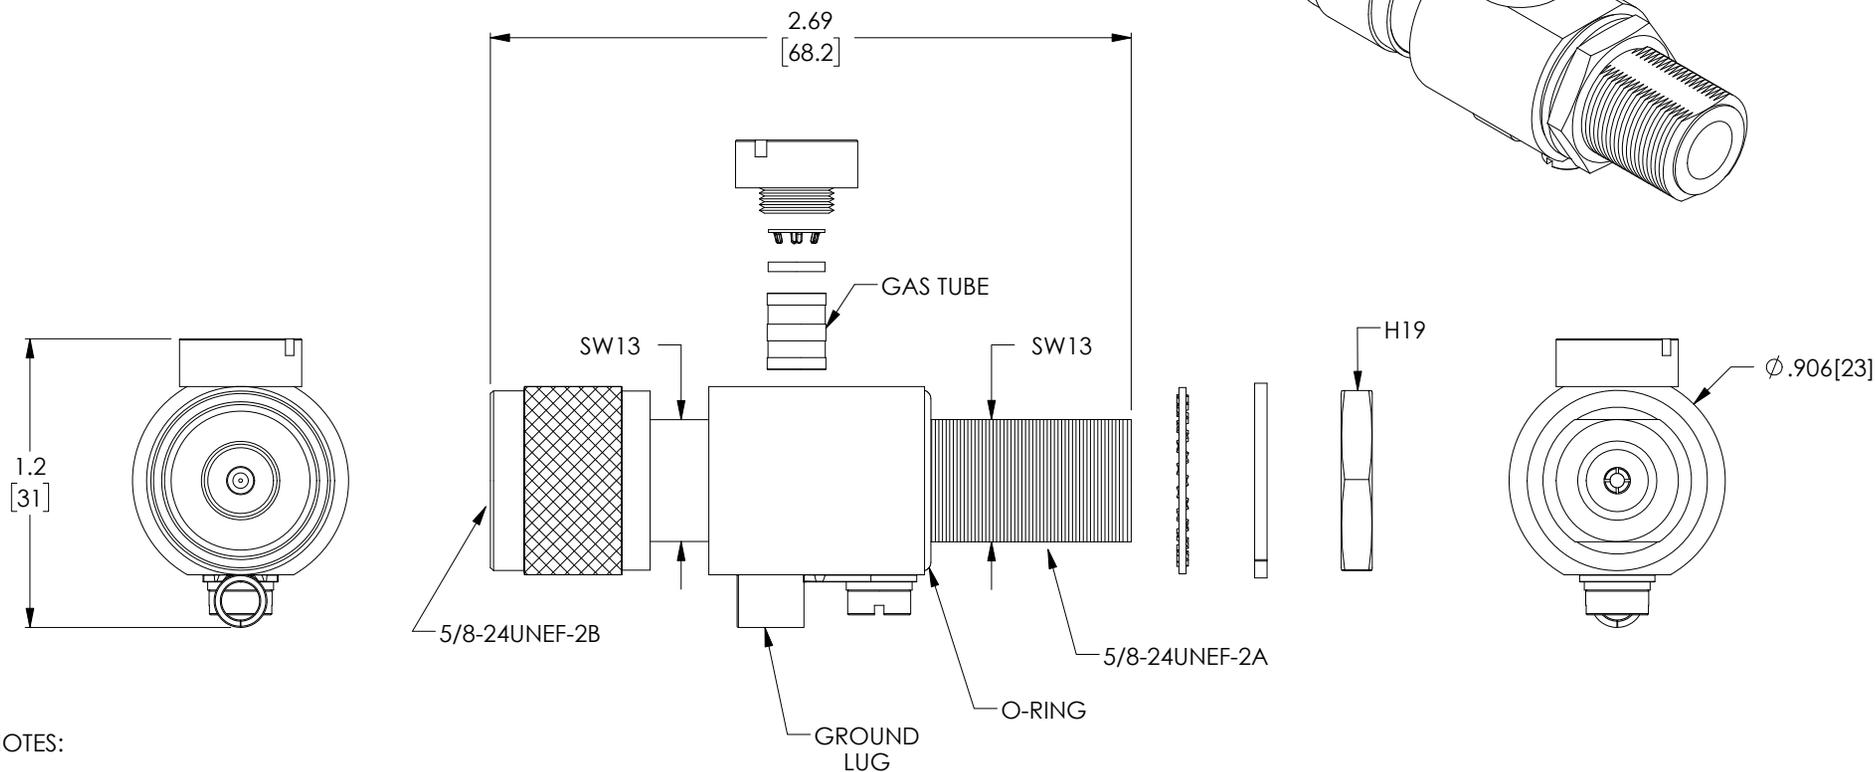


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/04/2015	BPUCHASKI
B	ECN 9475: REVISED GAS TUBE BREAKDOWN FROM 90V TO 180 V	10/25/2018	DFRISIELLO

DESCRIPTION	MATERIAL	FINISH
SHELL / BODY	BRASS	NICKEL
CENTER CONTACT	PHOS.BRONZE/BER.	GOLD
LINING PARTS	BRASS	NICKEL
O-RING	RUBBER	-
INSULATOR	TEFLON	-
FERRULE	BRASS	NICKEL

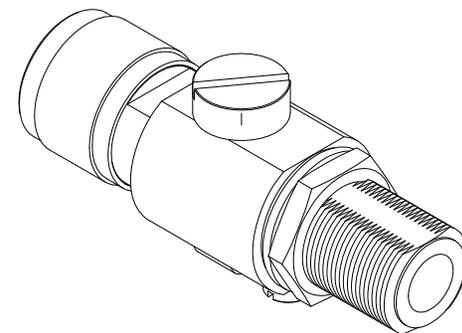

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0 - 6GHz
 VSWR: 1:1.2 MAX (0-6GHz)
 INSERTION LOSS: 0.6 dB MAX (0-6GHz)
 GAS TUBE BREAKDOWN VOLTAGE: 180V ± 20%

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PKG-00064.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY BPUCHASKI CHECKED BY K.BURGNER APPROVED BY K.BURGNER	DATE 11/03/2015 11/03/2015 11/03/2015	50 HIGH STREET NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY LIGHTNING PROTECTOR
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
	DWG. NO. AL6-NMNF BW-9		REV. B	SCALE: NONE CAD FILE: AL6-NMNF BW-9.SLDDRW SHEET 1 OF 1