

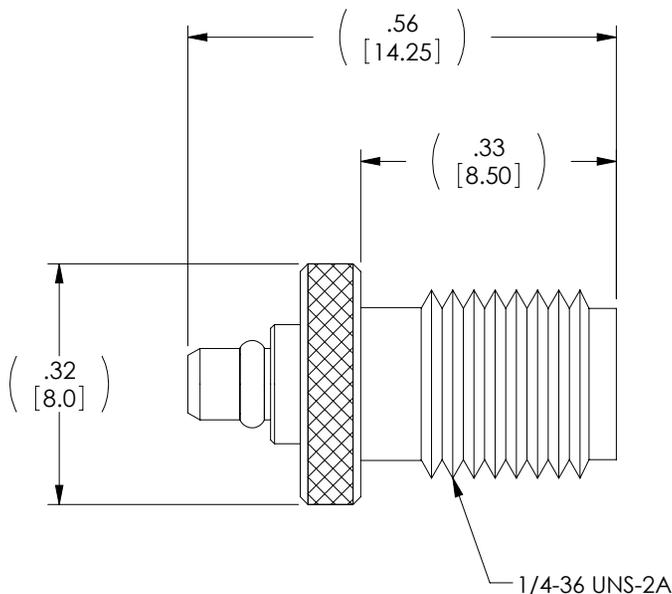


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/21/10	D.GRIFFIN

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD
CENTER PIN	PHOSPHOR BRONZE	GOLD
INSULATOR	TEFLON	-
RETAINING RING	BERYLLIUM COPPER	GOLD



**NOTES:**

**ELECTRICAL:**

IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: DC ~ 6 GHZ  
 INSERTION LOSS: .2 dB MAX.

**MISCELLANEOUS:**

CONNECTOR SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D. CASTRO CHECKED BY D. PARHAM APPROVED BY K. BURGNER	DATE 12/21/10 12/21/10 12/21/10	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY COAXIAL		PRODUCT DESCRIPTION ADP,MMCX PLUG / SMA JACK	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. AXA-MMPSF	REV. <b>A</b>
SCALE: NONE		CAD FILE: AXA-MMPSF.SLDDRW		SHEET 1 OF 1	