



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3807: REVISED PANEL CUTOUT & ADDED PANEL CUTOUT	1/23/09	D.FRISIELLO
F	ECN 4644: ADDED 75 OHMS IMPEDANCE, ADDED PACKAGING NOTE	3/26/10	D. CASTRO





2X F TYPE JACK

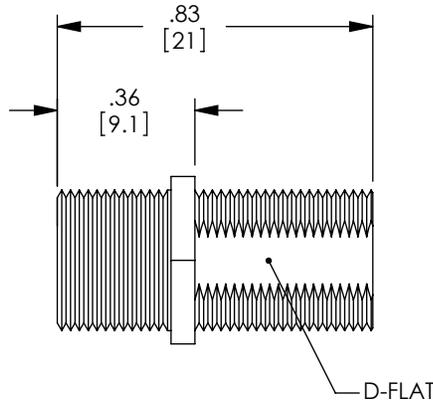


2X INSULATING SHOULDER WASHER

FLAT WASHER


HEX NUT

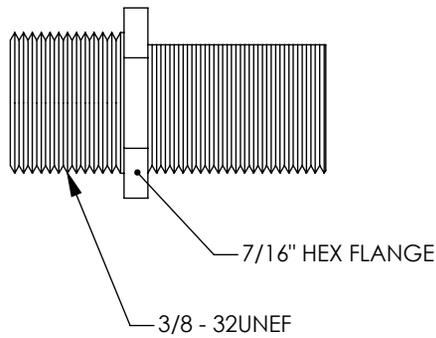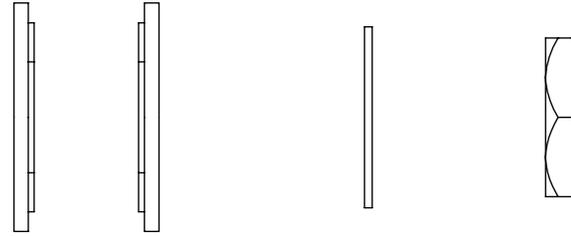

3/8 - 32UNEF

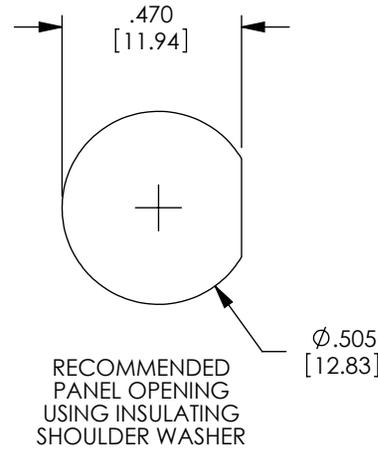

RECOMMENDED PANEL OPENING USING INSULATING SHOULDER WASHER

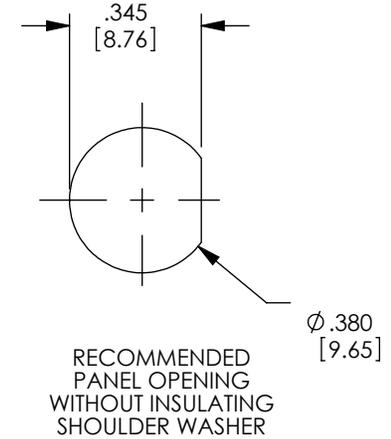

RECOMMENDED PANEL OPENING WITHOUT INSULATING SHOULDER WASHER


NOTES:

MATERIAL:
 BODY: BRASS
 CENTER PIN: PHOSPHOR BRONZE
 DIELECTRIC: POLYPROPYLENE

FINISH:
 BODY: NICKEL PLATED
 CENTER PIN: TIN PLATED

MISCELLANEOUS:
 IMPEDANCE: 75 OHMS
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED
 IN ACCORDANCE WITH L-COM SPEC. PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY TJC	5/23/03	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY DFP	5/28/02	CATEGORY COAXIAL
	APPROVED BY CM	5/28/02	PRODUCT DESCRIPTION F TYPE BULKHEAD FEED-THRU
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A FSCM NO. 43321 DWG. NO. BA330A REV. F SCALE: NONE CAD FILE: BA330A.SLDDRW SHEET 1 OF 1