


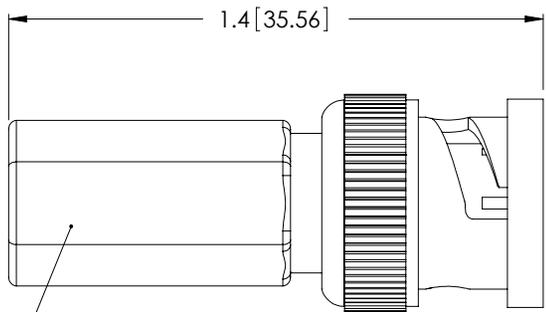


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3139: UPDATE DWG FORMAT	1/7/08	D.GRIFFIN
F	ECN5262: CORRECTED DIM LOCATION FOR .255. UPDATED FORMAT & PKG NOTE	01/19/11	DFP

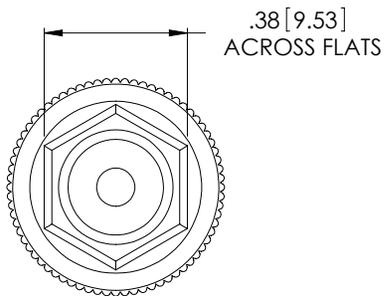

TWIST-ON FOR
RG6 CABLE

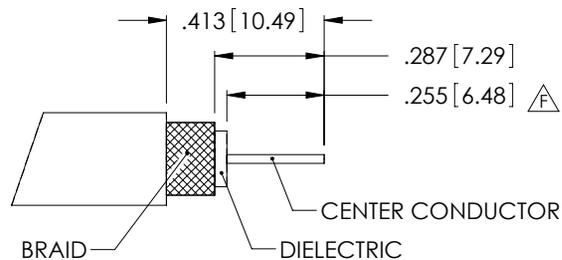

**RECOMMENDED
CABLE STRIPPING
DIMENSIONS**

NOTES:

MATERIAL:
BODY: DIECAST
SHELL: DIECAST
PIN: BRASS
INSULATOR: ACETAL

FINISH:
BODY: NICKEL PLATE
SHELL: NICKEL PLATE
PIN: GOLD PLATE

ELECTRICAL:
IMPEDANCE: 75 OHMS

PACKAGING:
CONNECTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

APPLICATION:
RG6 COAXIAL CABLE ASSEMBLIES

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	11/05/2001	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D.PARHAM	11/05/2001	CATEGORY COAXIAL
	APPROVED BY R.CARRICK	11/05/2001	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CONN 75 OHM BNC M RG6 TWIST
SCALE: NONE	SIZE A	FSCM NO. 43321	DWG. NO. BAC026 REV. F
CAD FILE: BAC026.SLDDRW		SHEET 1 OF 1	