


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/31/12	D.GRIFFIN

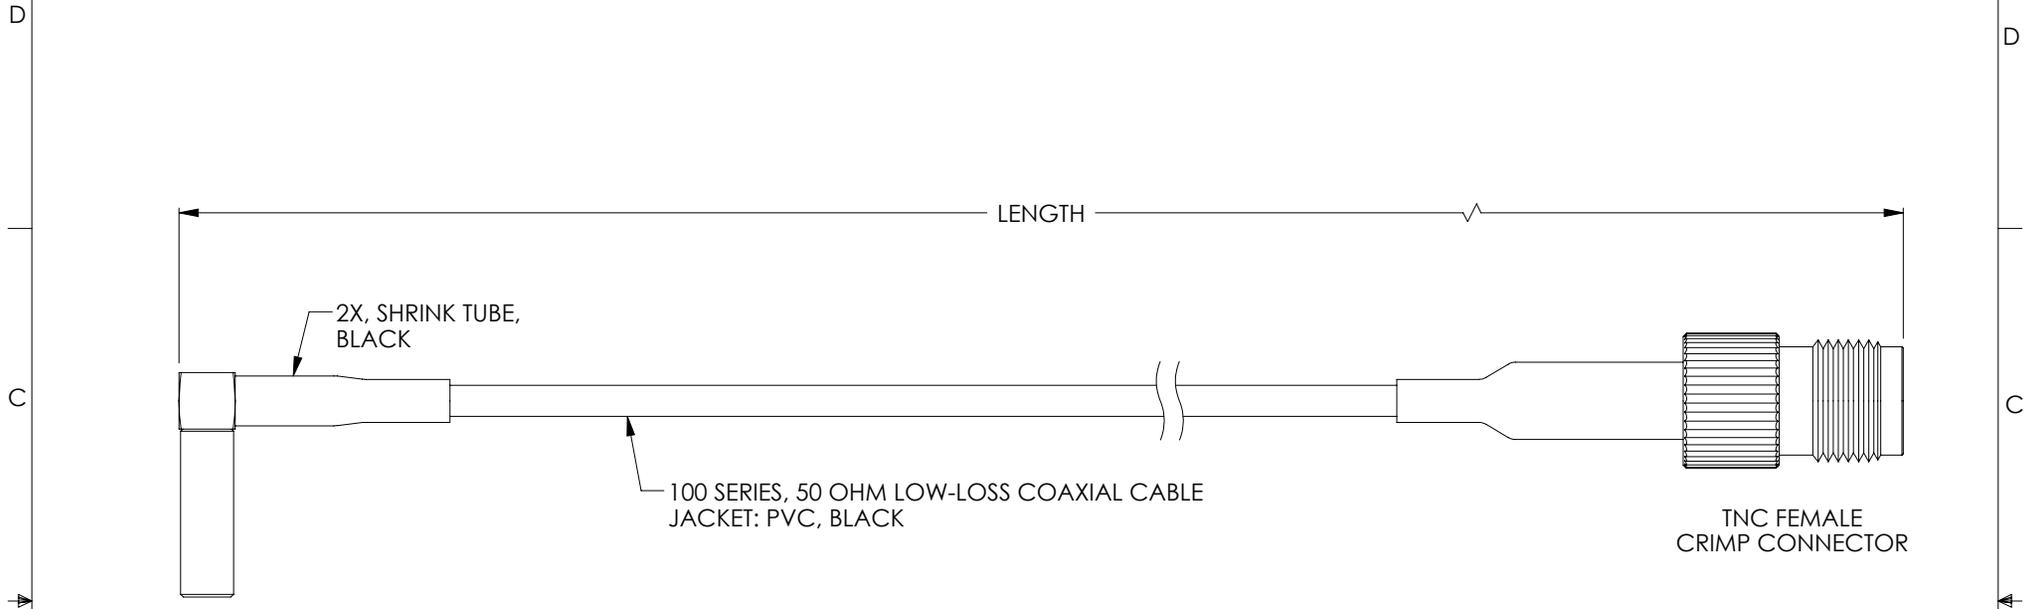

SMA NANO PLUG  
RIGHT ANGLE  
CRIMP CONNECTOR

100 SERIES, 50 OHM LOW-LOSS COAXIAL CABLE  
JACKET: PVC, BLACK

TNC FEMALE  
CRIMP CONNECTOR

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-SNPTFCXXX	WHERE XXX = LENGTH IN FEET	CA-SNPTFC010 (10 FEET)
CA-SNPTFCNXX	WHERE NXX = LENGTH IN INCHES	CA-SNPTFCN16 (16 INCHES)
CA-SNPTFCMXX	WHERE MXX = LENGTH IN METERS	CA-SNPTFCM07 (7 METERS)
CA-SNPTFCXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA-SNPTFC3M5 (3.5 METERS)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $> 12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $> 60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $> 120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $> 300$ [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	APPROVALS DRAWN BY D. DESJARDIN CHECKED BY K. BURGNER APPROVED BY K. BURGNER	DATE 12/31/12 12/31/12 12/31/12		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			CATEGORY <b>COAXIAL</b>	PRODUCT DESCRIPTION <b>CA,CA-100 SMA-NANO/TNC F</b>	
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>		DWG. NO. <b>CA-SNPTFC</b>
	SCALE: NONE			CAD FILE: CA-SNPTFC.SLDDRW		SHEET 1 OF 1