


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	APPROVED FOR PRODUCTION PER STEVE SMITH	10/08/02	MCCORMICK
B	ECN 3798: CN RELEASE AND NEW FORMAT	2/6/09	D.FRISIELLO
C	ECN 6729: REVISED FORMAT, L-COM LOGO'S, NOTES 2 & 6, ADD ROHS	3/15/13	D.FRISIELLO
D	ECN 7529: CHG'S PANTONE TO 424C FROM 422C, UPDATED FORMAT & ROHS	7/23/14	D. CASTRO

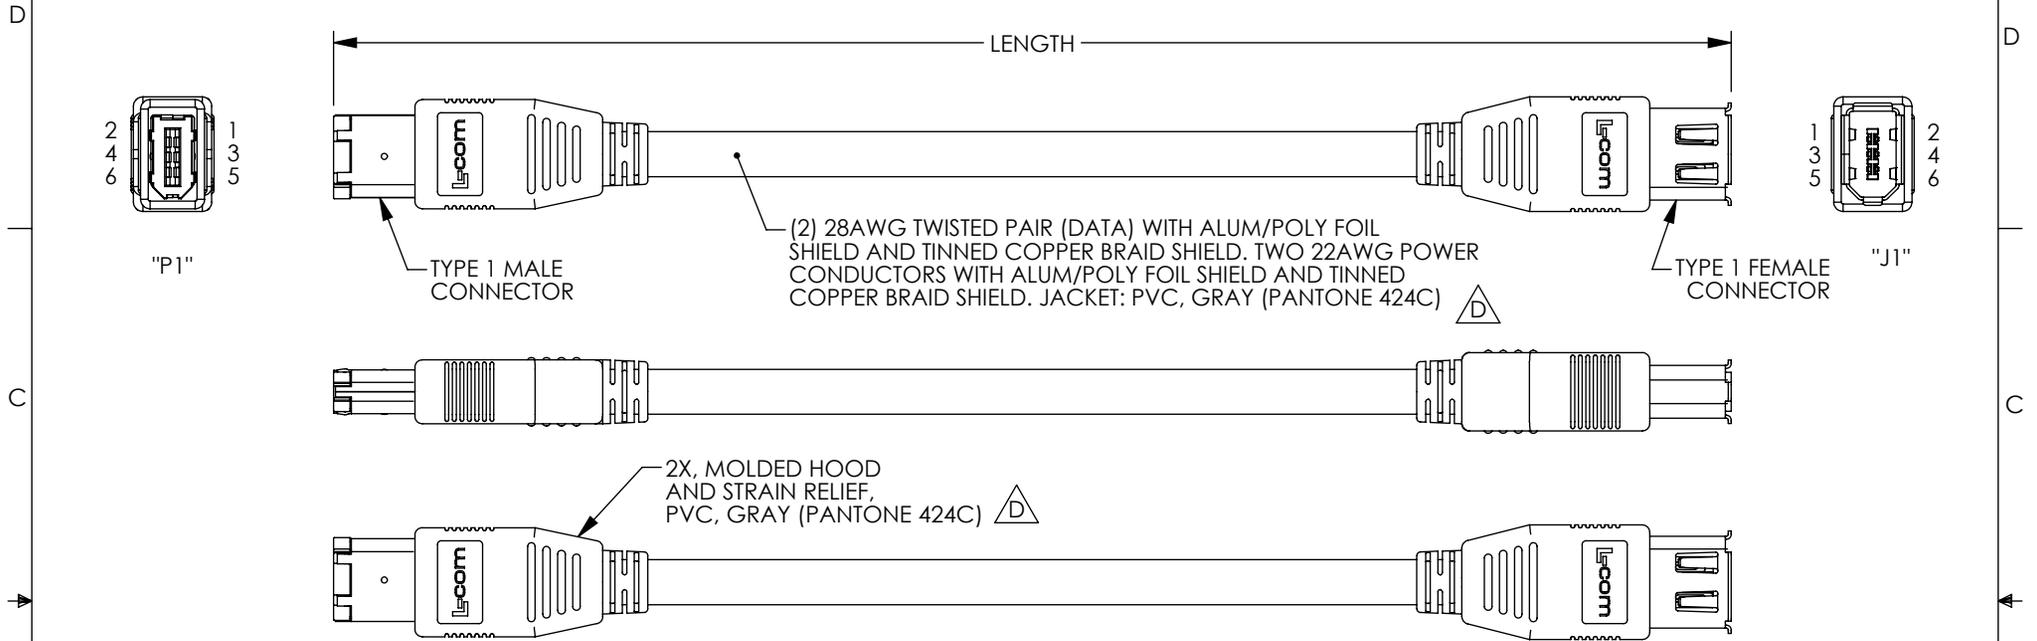

MODEL NUMBER	LENGTH	
	METERS	FEET
CSM94X-1M	1.0	3.28
CSM94X-2M	2.0	6.56
CSM94X-3M	3.0	9.84

WIRING TABLE		
"P1" TYPE 1 CONNECTOR	"J1" TYPE 1 CONNECTOR	WIRE DESCRIPTION
PIN 1	PIN 1	22AWG
PIN 2	PIN 2	22AWG
PIN 3	PIN 3	SHIELDED TWISTED PAIR
PIN 4	PIN 4	
PIN 5	PIN 5	SHIELDED TWISTED PAIR
PIN 6	PIN 6	
SHELL	SHELL	OVERALL SHIELD
PIN 2	PIN 2	PAIR ONE SHIELDING PAIR TWO SHIELDING

NOTES:

- CABLE ASSEMBLY CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394 (FIREWIRE) SPECIFICATION.
- CONTACT FINISH GOLD FLASH OVER 50µin NICKEL (MINIMUM).
- TWISTED PAIRS INDIVIDUALLY SHIELDED. SHIELDS TIED TOGETHER AND TIED TO PIN 2.
- CABLE OVERALL SHIELD CONNECTED TO METAL SHELLS OF BOTH PLUGS. OVERALL SHIELD ISOLATED FROM TWISTED PAIRS' SHIELDS.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY MCCORMICK	09/25/02		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	CHECKED BY D.PARHAM	09/25/02	PRODUCT DESCRIPTION	CBL, IEEE1394 TYPE 1 EXT
PROJECTION	APPROVED BY R.CARRICK	09/25/02	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR		SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. CSM94X	REV. <b>D</b>
			SCALE: NONE	CAD FILE: CSM94X.SLDDRW
				SHEET 1 OF 1