
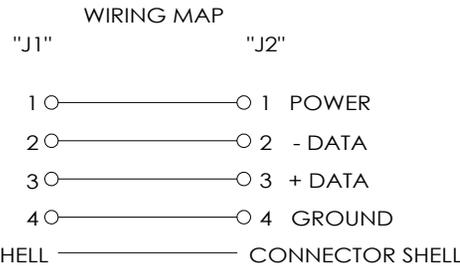
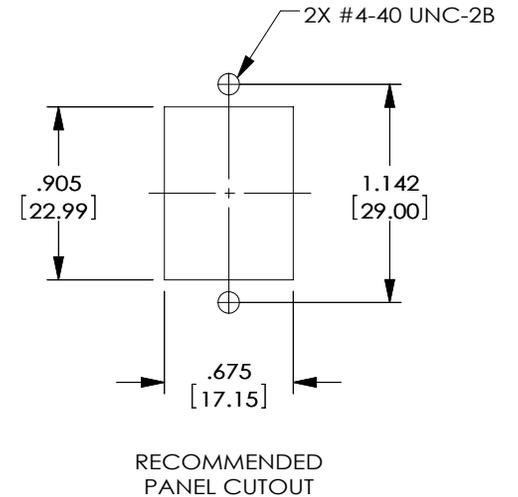
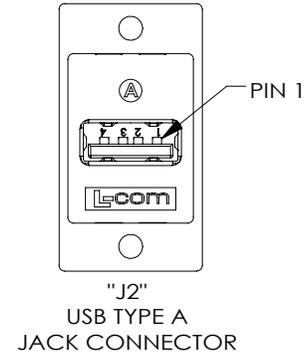
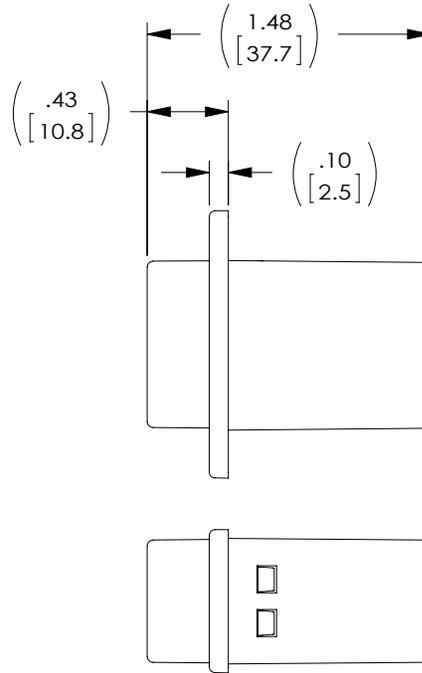


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 8409: UPDATE TEMPERATURE RATING TO -10~70°C	7/15/16	S.LI

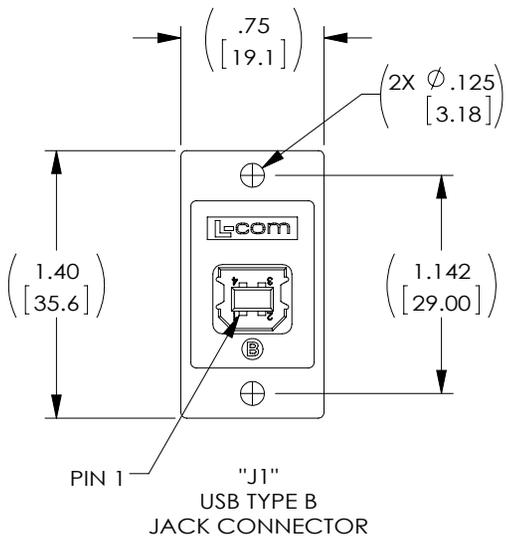

**NOTES:**

**MATERIAL:**  
 COUPLER HOUSING: ABS, UL94V-0.  
 CONNECTOR INSULATORS: WHITE, PBT WITH GLASS FIBER.  
 TYPE "A" CONNECTOR CONTACTS: PHOSPHOR BRONZE.  
 TYPE "A" CONNECTOR SHELL: BRASS.  
 TYPE "B" CONNECTOR CONTACTS: PHOSPHOR BRONZE.  
 TYPE "B" CONNECTOR SHELL FRONT: BRASS.  
 TYPE "B" CONNECTOR SHELL BACK: STEEL.  
 PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING.

**FINISH:**  
 COUPLER HOUSING: COLOR, IVORY.  
 CONNECTOR CONTACTS: GOLD, 30μ INCHES.  
 CONNECTOR SHELLS: NICKEL.

**ELECTRICAL:**  
 CURRENT RATING: 2 AMP MAX.  
 VOLTAGE RATING: 140 VDC.

**ENVIRONMENTAL:**  
 OPERATING TEMPERATURE: -10° C TO +70° C.

**MISCELLANEOUS:**  
 COUPLER SHALL BE TESTED FOR CONTINUITY.  
 COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.

**REGULATORY COMPLIANCE:**  
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	1/10/12		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	CHECKED BY F.MAO	1/10/12	PRODUCT DESCRIPTION	CPLR PNL MNT USB B/A IVORY
PROJECTION 	APPROVED BY S.SMITH	1/0/12	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR		SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. ECF504-UBA	REV. <b>E</b>
			SCALE: NONE	CAD FILE: ECF504-UBA.SLDDRW
				SHEET 1 OF 1